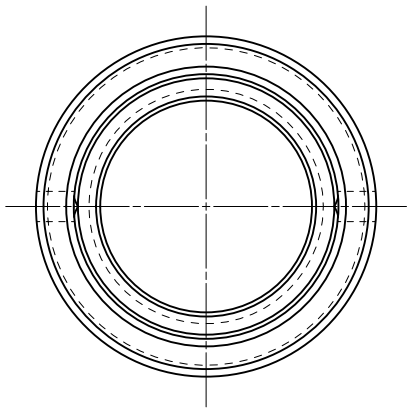



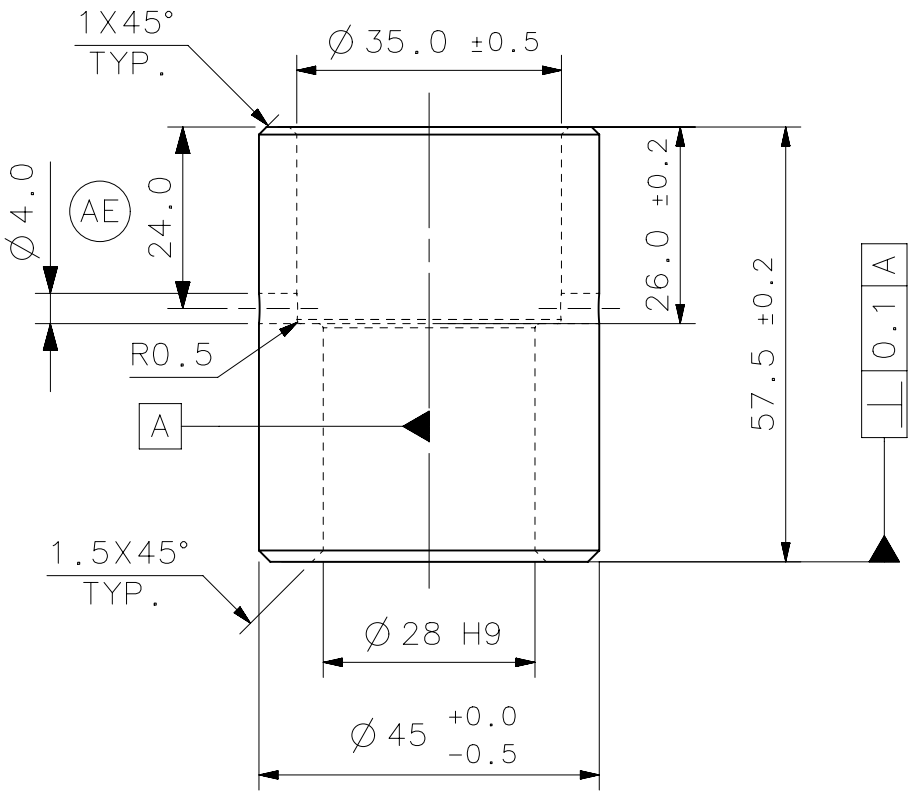

<SC> :SIGNIFICANT CHARACTERISTICS ▽ :CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989

DIMENSIONS

LINEAR IN mm.	OVER	0.5	3	6	30	120	400	1000	2000
	UPTO	3	6	30	120	400	1000	2000	4000
f FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-
m MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
c COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4
v VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8

		LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.				
ANGULAR IN deg.	OVER	-	10	50	120	400
	UPTO	10	50	120	400	-
f FINE (X.XXX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'
m MEDIUM (X.XX)						
c COARSE (X.X)		± 1° 30'	± 1°	± 0° 30'	± 0° 15'	± 0° 10'
v VERY COARSE (X)		± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'

PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT WRITTEN PERMISSION OF M & M LTD.

COMPUTER GENERATED DRAWING | DO NOT CHANGE MANUALLY

IF IN DOUBT, ASK | DO NOT SCALE | DRG SIZE : A4

MAHINDRA & MAHINDRA LIMITED
TRACTOR DIVISION
KANDIVLI(EAST), MUMBAI 400 101, INDIA.

E.R. / PROC.REQ.NO : 500000002958

PART NO. : 007530819D2

PART NAME : BUSH – BATTERY TRAY

MATERIAL : Fe410W

HEAT TREATMENT :

	NAME	SIGN	DATE
CAD ENGG.			
DESIGNER	PKS		19/03/05
CHECKER	RNM		19/03/05
APPR.BY	DHM		19/03/05

FIRST USED TRCR. MODEL 8000 2WD/4WD

SCALE 1:1

SHEET 1 OF 1

UNIT QTY. : 1

WEIGHT : 0.364 kg.

ALL DIMENSIONS ARE IN mm. | CHECK DRG WITH LATEST CHANGE No

E.R.NO.	LET	LOC	REVISIONS	DSNR	CKR.	APPR.	DATE
ER1710004049	AE		DIA 4 MM HOLE ADDED	PRP	NVC	RAW	09/08/17
600000010202	AD		REDRAWN WITH 3D REF.	PG	NVC	RAW	17/07/15